



High Power Output
Low LCOE



Maximum Power
515W+



TWMNH
N-type Half-cell
Bifacial Module (54)

54HD495-515W

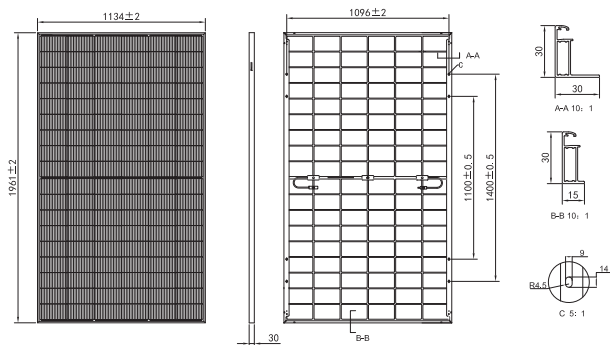
en.tongwei.com.cn



TIER1
Bloomberg
NEW ENERGY FINANCE



Learn More

 DRAWINGS (Unit: mm) **ELECTRICAL CHARACTERISTICS (STC)**

Module Type: TWMNH-54HDXXX

Maximum Power: Pmax [W]	495	500	505	510	515
Open Circuit Voltage: Voc [V]	39.88	40.06	40.24	40.42	40.60
Short Circuit Current: Isc [A]	15.86	15.89	15.92	15.95	15.98
Voltage at Maximum Power: Vmp [V]	33.45	33.70	33.94	34.19	34.43
Current at Maximum Power: Imp [A]	14.80	14.84	14.88	14.92	14.96
Module Efficiency: η [%]	22.3	22.5	22.7	22.9	23.2

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass1.5 **ELECTRICAL CHARACTERISTICS (NMOT)**

Maximum Power: Pmax [W]	374	378	381	385	389
Open Circuit Voltage: Voc [V]	37.97	38.14	38.31	38.48	38.65
Short Circuit Current: Isc [A]	12.80	12.83	12.85	12.88	12.90
Voltage at Maximum Power: Vmp [V]	31.30	31.56	31.73	31.96	32.21
Current at Maximum Power: Imp [A]	11.95	11.98	12.01	12.05	12.08

* NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass1.5, Wind Speed 1m/s **Electrical characteristics with different rear side power gain**

5%	Maximum Power: Pmax [W]	519	525	530	535	540
	Module Efficiency: η [%]	23.3	23.6	23.8	24.1	24.3
15%	Maximum Power: Pmax [W]	569	575	580	586	592
	Module Efficiency: η [%]	25.6	25.9	26.1	26.4	26.6
25%	Maximum Power: Pmax [W]	618	625	631	637	643
	Module Efficiency: η [%]	27.8	28.1	28.4	28.6	28.9

 TEMPERATURE RATING

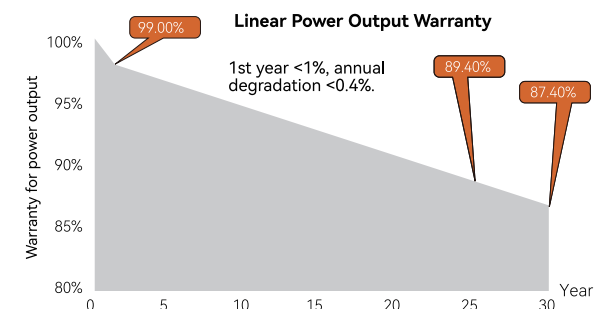
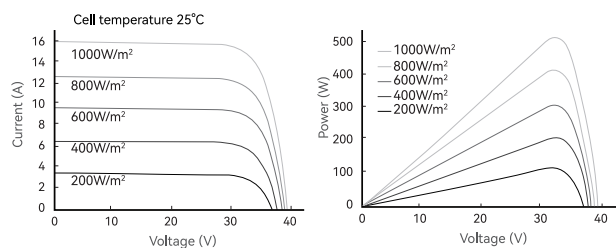
Temperature Coefficient of Pmax	-0.28%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	+0.046%/°C
NMOT	45±2°C

 OPERATING PARAMETERS

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A
Power Output Tolerance	0~+3%

 MECHANICAL PARAMETERS

Cell Type	TNC (N Type Monocrystalline Cell)
Cell Orientation	108[6×18]
Dimensions	1961±2×1134±2×30mm
Weight	27.4 kg
Front Glass	2.0mm AR coated heat strengthened glass
Rear Glass	2.0mm heat strengthened glass
Frame	Anodized aluminum alloy frame
Junction Box	IP68, 3 diodes
Cable	4.0mm ²
Cable length	±1200mm, length can be customized
Wind/Snow load	2400Pa/5400Pa
Packaging	36pcs per pallet, 864pcs per 40'HC

 WARRANTY **I-V CURVE** **CERTIFICATIONS****Quality Management System and Product Certification**

ISO 9001: 2015/Quality management system
ISO 14001: 2015/Environmental management system
ISO 45001: 2018/Occupation health safety management system
ISO 50001: 2018/Energy management system
IEC 62941: 2019/Quality system for PV module manufacturing
IEC 61215/61730, IEC 62804(PID), IEC 61701(Salt),
IEC 62716 (Ammonia), IEC 60068-2-68(Sand)



Email: sales@tongwei.com Website: en.tongwei.com.cn Add: No.588, Middle Section Tianfu Avenue, High-Tech Zone, Chengdu, China (Sichuan) Pilot Free Trade Zone Tel: +86 02860666455

Statement: With technological process and product update, there maybe deviation between the technical parameters of Tongwei's module products and the technical parameters contained in the specification, and Tongwei Solar has the right to adjust the technical parameters at any time without notifying the customer, the final interpretation of the technical specification is vested in Tongwei Solar. (Preview-20240703)